

MV-AC10G-2LC-2LC-ST

STANDARD 10GIGE OPTICAL FIBER PATCH CORD

The Standard 10GigE Optical Fiber Patch Cord,with central wavelength 850 nm and multimode 50/125 μm ,can be used for data transmission of 10GigE optical fiber interface in static scene.



Applicable Products


Hikrobot 10GigE Fibre-optical Interface Camera and Frame Grabber

Order Models

- 3m Standard 10GigE Optical Fiber Patch Cord: MV-AC10G-2LC-2LC-ST-3m
- 5m Standard 10GigE Optical Fiber Patch Cord: MV-AC10G-2LC-2LC-ST-5m
- 10m Standard 10GigE Optical Fiber Patch Cord: MV-AC10G-2LC-2LC-ST-10m


Dimension

3/5m Patch Cord:

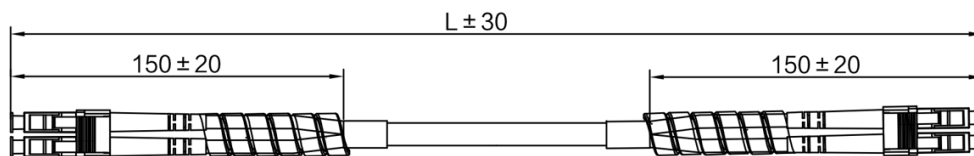

Unit: mm

10m Patch Cord:

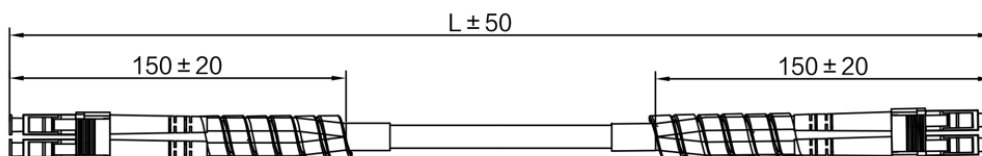

Unit: mm



Specification

Model	MV-AC10G-2LC-2LC-ST
Specifications	Standard 10GigE Optical Fiber Patch Cord
Physical specification	
End A connector	LC
End B connector	LC
Cable diameter	6.5 mm
Length	3/5/10 m
Fiber type	Multimode 50/125 μm
Central wavelength	850 nm
Insertion loss	≤ 0.30 dB
Return loss	≥ 25 dB
Cable color	Black
Connector durability	1000 cycles
Applicable scenario	Static scenes
Additional information	
Working temperature	-20 $^{\circ}\text{C}$ ~ 75 $^{\circ}\text{C}$
Certification	RoHS
Packaging	Individual package

Read the user manual for the related products including the precautions before connecting the cable to the camera.

HIKROBOT

Hangzhou Hikrobot Co. Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.
Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.