

**MV-ACCL-SDR-SDR-HF-\*m**

**Camera Link HIGH FLEX DATA CABLE**

The Camera Link Flex Data Cable can be used for data transmission of Camera Link interface cameras, and is available in a variety of lengths.



**Applicable Camera:**


- Hikrobot Camera Link Interface Area Scan Camera
- Hikrobot Camera Link Interface Line Scan Camera

**Order Models:**


- 3m Camera Link SDR-SDR High Flex Data Cable: MV-ACCL-SDR-SDR-HF-3m
- 5m Camera Link SDR-SDR High Flex Data Cable: MV-ACCL-SDR-SDR-HF-5m
- 7m Camera Link SDR-SDR High Flex Data Cable: MV-ACCL-SDR-SDR-HF-7m

**Dimension:**


MV-ACCL-SDR-SDR-HF-3m

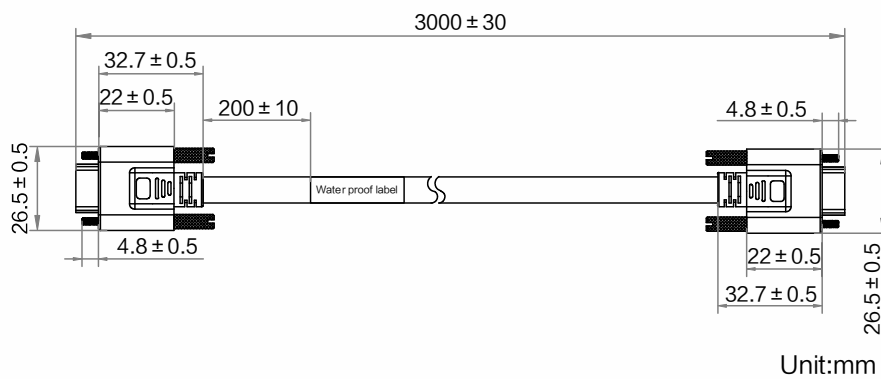

MV-ACCL-SDR-SDR-HF-5m

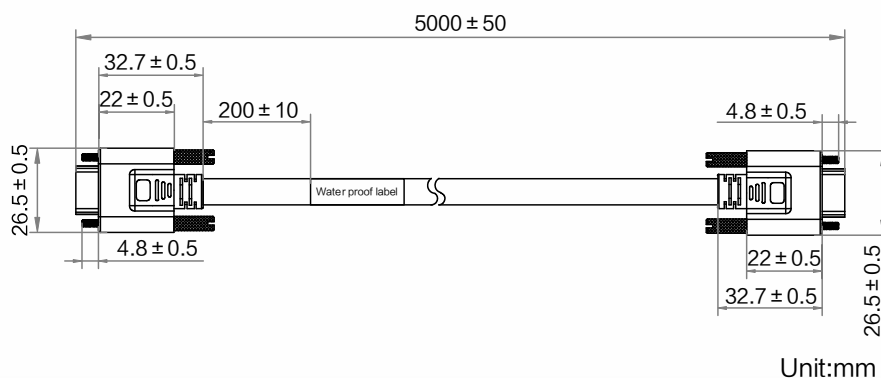

# MV-ACCL-SDR-SDR-HF-7m

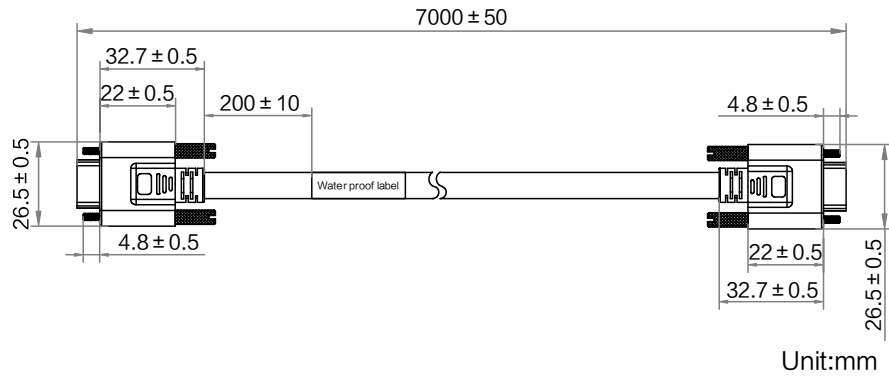

## Specification

Model	MV-ACCL-SDR-SDR-HF-*m
Specifications	Camera Link High Flex Data Cable
<b>Physical specification</b>	
End A connector	SDR26
End B connector	SDR26
Cable diameter	9.5 mm
Length	3/5/7 m
Cable mechanical	UL20276
Jacket	PVC
Cable color	Black
Connector model	made in China
Connector durability	≥500 cycles
Min. bending radius	114 mm
Applicable scenario	Drag chain
Max. U-type bending cycles	5 million times
<b>Electrical specification</b>	
Max. voltage	30 VDC
<b>Additional information</b>	
Working temperature	-20°C ~ 80°C
Certification	UL
Packaging	Individual package

Read the user manual for the camera including the precautions before connecting the cable to the camera.



Hangzhou Hikrobot Co., Ltd.  
en.hikrobotics.com