

MV-ACCL-SDR-SDR-ST

CAMERA LINK SDR-SDR STANDARD DATA CABLE

The Camera Link Standard Data Cable can be used for data transmission of Camera Link interface cameras, and is available in a variety of lengths.



Applicable Camera:


- Hikrobot Camera Link Interface Area Scan Camera
- Hikrobot Camera Link Interface Line Scan Camera

Order Models:


- 3m Camera Link SDR-SDR Standard Data Cable: MV-ACCL-SDR-SDR-ST-3m
- 5m Camera Link SDR-SDR Standard Data Cable: MV-ACCL-SDR-SDR-ST-5m
- 7m Camera Link SDR-SDR Standard Data Cable: MV-ACCL-SDR-SDR-ST-7m

Dimension:


MV-ACCL-SDR-SDR-ST-3m:

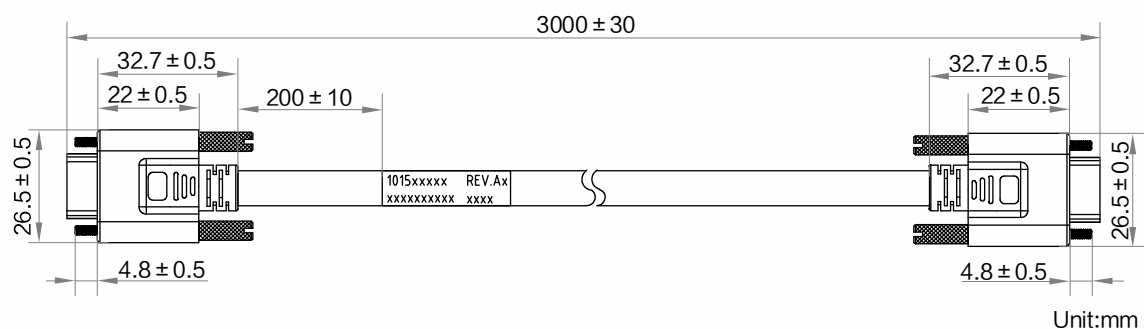

MV-ACCL-SDR-SDR-ST-5m:

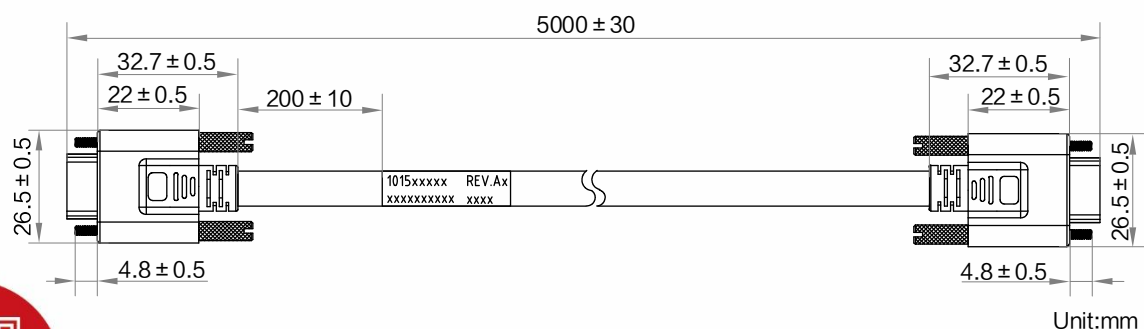

MV-ACCL-SDR-SDR-ST-7m:

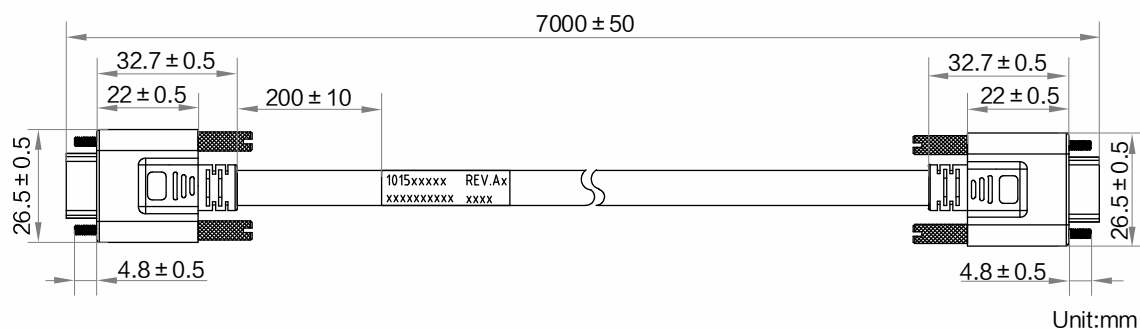

Specification

Model	MV-ACCL-SDR-SDR-ST
Specifications	Camera Link SDR-SDR Standard Data Cable
Physical specification	
End A connector	SDR
End B connector	SDR
Cable diameter	9.5 mm
Length	3/5/7 m
Cable mechanical	(28AWG*1P+AL)*11C+28AWG*2C+MY+AL+B, UL20276
Jacket	PVC
Cable color	Black
Connector durability	≥500 cycles
Min. bending radius	114 mm
Applicable scenario	Static scenes
Electrical specification	
Max. voltage	30 VDC
Additional information	
Working temperature	-20℃ ~ 80℃
Certification	RoHS, UL
Packaging	Individual package

Read the user manual for the camera including the precautions before connecting the cable to the camera.

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.