

**MV-ACG-RJ45s(up)-RJ45-ST-\*m**

**RJ45 STANDARD (BEND) GIGABIT ETHERNET CABLE**

The RJ45 Standard (Bend) Gigabit Ethernet Cable can be used for data transmission of RJ45 Gigabit Ethernet interface cameras, and is available in a variety of lengths.




**Applicable Camera:**

- Hikrobot RJ45 Gigabit Ethernet Interface Area Scan Camera
- Hikrobot RJ45 Gigabit Ethernet Interface Line Scan Camera

**Order Models:**

- 3m RJ45 Standard (Bend, up) Gigabit Ethernet Cable: MV-ACG-RJ45s(up)-RJ45-ST-3m
- 5m RJ45 Standard (Bend, up) Gigabit Ethernet Cable: MV-ACG-RJ45s(up)-RJ45-ST-5m
- 15m RJ45 Standard (Bend, up) Gigabit Ethernet Cable: MV-ACG-RJ45s(up)-RJ45-ST-

**Dimension:**

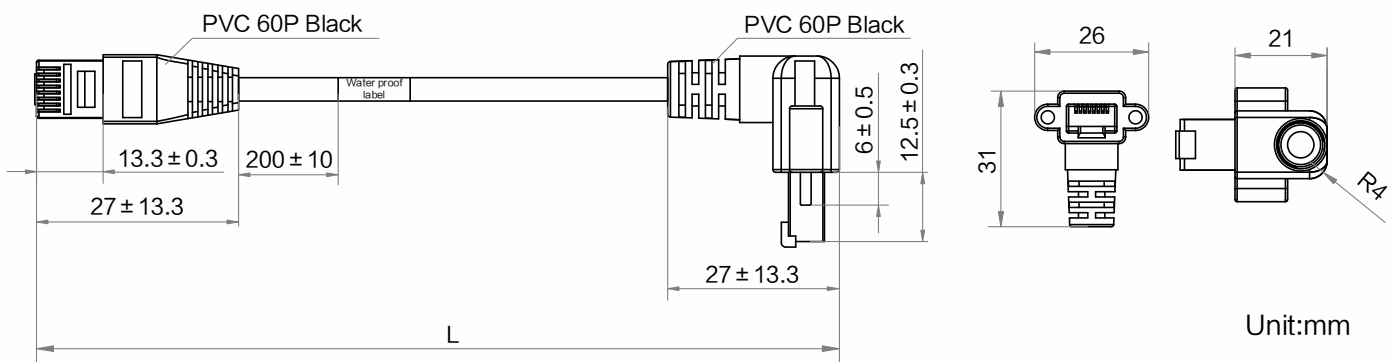

## Specification

Specifications	Model	MV-ACG-RJ45s(up)-RJ45-ST-*m
		RJ45 Standard (Bend) Gigabit Ethernet Cable
<b>Physical specification</b>		
End A connector		RJ45 (with locking stud), Bend (up)
End B connector		RJ45
Cable diameter		6.2 mm
Length		3/5/15 m
Cable mechanical		4P*26#+AB
Jacket		PVC
Cable color		Black
Connector durability		≥ 750 cycles
Min. bending radius		74.4 mm
Applicable scenario		Static scene
<b>Electrical specification</b>		
Max. voltage		30 VDC
<b>Additional information</b>		
Working temperature		-20°C ~ 75°C
Certification		RoHS2.0, UL
Packaging		Individual package

Read the user manual for the camera including the precautions before connecting the cable to the camera.

**HIKROBOT**

Hangzhou Hikrobot Co., Ltd.  
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.