

MV-ACP-H6p(left)-open-HF-*m

6-PIN P7 HIGH FLEX (LEFT SIDE) POWER&I/O CABLE

The 6-pin P7 High Flex (Left side) Power&I/O Cable can be used to power the camera, I/O signal wiring, and is available in a variety of lengths.

Applicable Camera:


Hikrobot 6-pin P7 Power and I/O Interface Industrial Camera



Order Models:


- 3m 6-pin P7 High Flex (Left side) Power&I/O Cable: MV-ACP-H6p(left)-open-HF-3m
- 5m 6-pin P7 High Flex (Left side) Power&I/O Cable: MV-ACP-H6p(left)-open-HF-5m
- 15m 6-pin P7 High Flex (Left side) Power&I/O Cable: MV-ACP-H6p(left)-open-HF-15m

Dimension:

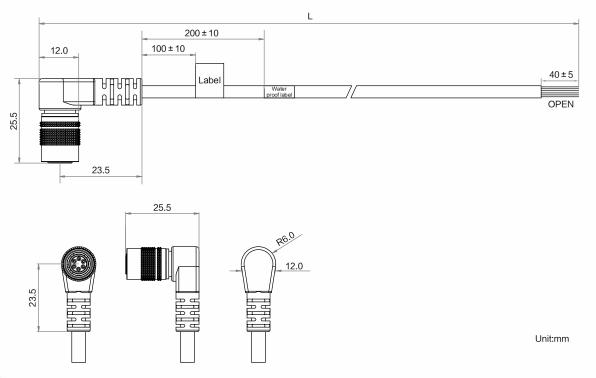



Pin Definition



Pin	Wire Color
1	Orange
2	Yellow
3	Purple
4	Blue
5	Green
6	Gray

Specification

Model	MV-ACP-H6p(left)-open-HF-*m
Specifications	6-pin P7 High Flex (Left side) Power&I/O Cable
Physical specification	
End A connector	P7 6-pin,Femal,Left side
End B connector	Open
Cable diameter	5.5 mm
Length	3/5/15 m
Cable mechanical	2P*28AWG+2C*23AWG+AB
Jacket	PVC
Cable color	Black
Connector model	made in China
Connector durability	≥750 cycles
Min. bending radius	66 mm
Applicable scenario	Tank chain
Max. U-type bending cycles	≥5 million times
Electrical specification	
Max. voltage	30 VDC
Additional information	
Working temperature	-20℃ ~80℃
Certification	RoHS2.0, UL
Packaging	Individual package

Read the user manual for the camera including the precautions before connecting the cable to the camera.



Hangzhou Hikrobot Co., Ltd. en.hikrobotics.com