

MV-ACU3-MBMs-AM-SF

USB3.0 SUPER FLEX DATA CABLE

The USB3.0 Super Flex Data Cable can be used for data transmission and power supply of USB3.0 interface cameras, and is available in a variety of lengths.




Applicable Camera:

- Hikrobot USB3.0 Interface Area Scan Camera
- Hikrobot USB3.0 Interface Board Level camera

Order Models:

- 3m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-3m
- 5m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-5m
- 7m USB3.0 Super Flex Data Cable : MV-ACU3-MBMs-AM-SF-7m
- 10m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-10m
- 15m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-15m
- 20m USB3.0 Super Flex Data Cable: MV-ACU3-MBMs-AM-SF-20m

Dimension:

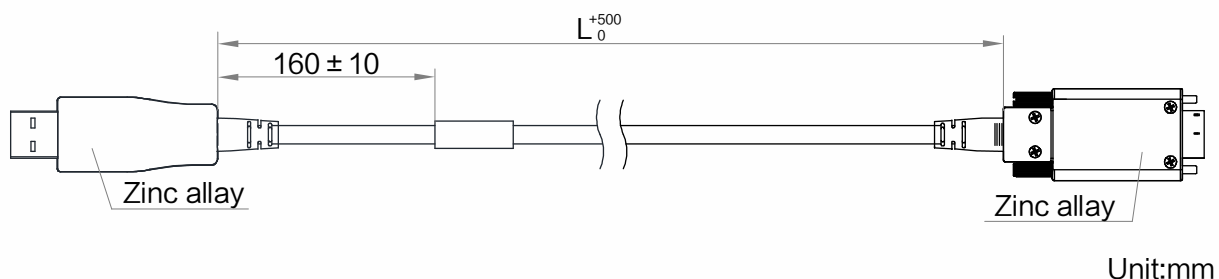

Specification

Specifications	Model	MV-ACU3-MBMs-AM-SF
		USB 3.0 Super Flex Data Cable
Physical specification		
End A connector		Micro-B male (with screw)
End B connector		A male
Cable diameter		4.8 mm
Length		3/5/7/10/15/20 m
Cable mechanical		(1P*26#+ADBMP)2C+1P*26#+1P*24#+FPB
Jacket		Nitrile PVC
Cable color		Black
Connector durability		5,000 cycles
Min. bending radius		57.6 mm
Applicable scenario		Static scenes/tank chain
Max. U-type bending cycles		10 million times
Max. $\pm 90^\circ$ bending cycles		5 million times
Electrical specification		
Max. voltage		5 VDC
Additional information		
Working temperature		-20°C ~ 80°C
Certification		RoHS
Packaging		Individual package

*Read the user manual for the camera including the precautions before connecting the cable to the camera.

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.