

MV-ACXP12-HDBNC-HDBNC-ST-*m

CXP-12 STANDARD DATA CABLE

The CXP-12 Standard Data Cable can be used for data transmission of CoaxPress interface cameras, and is available in a variety of lengths.




Applicable Camera:

Hikrobot CoaxPress Interface Industrial Camera

Order Models:

- 3m CXP-12 Standard Data Cable: MV-ACXP12-HDBNC-HDBNC-ST-3m
- 5m CXP-12 Standard Data Cable: MV-ACXP12-HDBNC-HDBNC-ST-5m
- 10m CXP-12 Standard Data Cable: MV-ACXP12-HDBNC-HDBNC-ST-10m

Dimension:

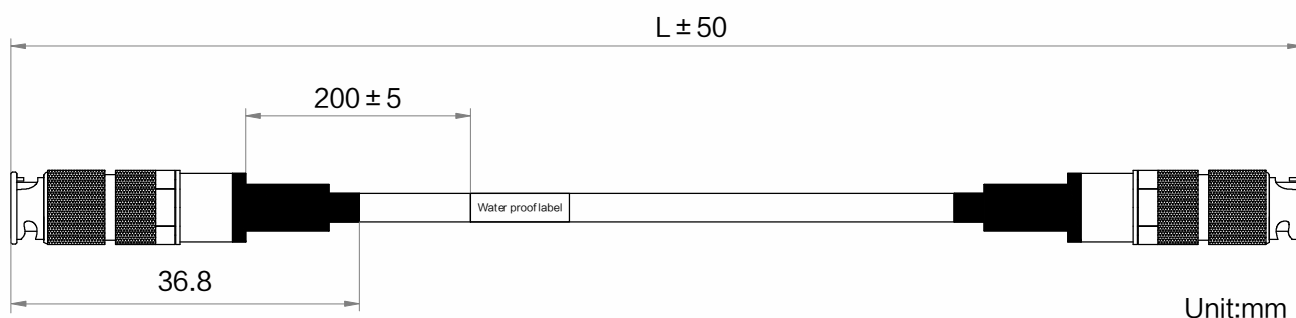

Specification

Specifications	Model	MV-ACXP12-HDBNC-HDBNC-ST-*m
		CXP-12 Standard Data Cable
Physical specification		
End A connector		HD-BNC
End B connector		HD-BNC
Cable diameter		7 mm
Length		3/5/10 m
Cable mechanical		Coaxial
Jacket		PVC
Cable color		Black
Connector durability		500 cycles
Min. bending radius		84 mm
Applicable scenario		Static scenes
Electrical specification		
Max. voltage		300 VDC
Additional information		
Working temperature		-20°C ~ 80°C
Certification		UL
Packaging		Individual package

Read the user manual for the camera including the precautions before connecting the cable to the camera.

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.