

MV-ACXP6-DIN-DIN-HF-*m
CXP-6 HIGH FLEX DATA CABLE

The CXP-6 High Flex Data Cable can be used for data transmission of CoaxPress interface cameras, and is available in a variety of lengths.




Applicable Camera:

Hikrobot CoaxPress Interface Industrial Camera

Order Models:

- 3m CXP-6 High Flex Data Cable: MV-ACXP6-DIN-DIN-HF-3m
- 5m CXP-6 High Flex Data Cable: MV-ACXP6-DIN-DIN-HF-5m
- 10m CXP-6 High Flex Data Cable: MV-ACXP6-DIN-DIN-HF-10m

Dimension:

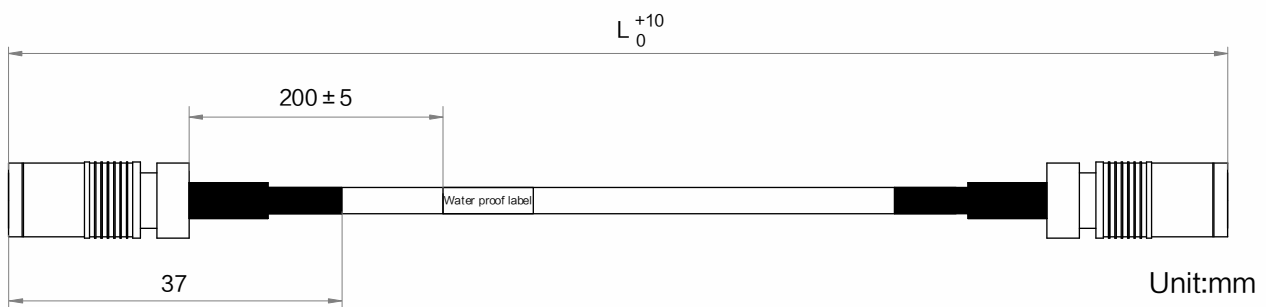

Specification

Model	MV-ACXP6-DIN-DIN-HF-*m
Specifications	CXP-6 High Flex Data Cable
Physical specification	
End A connector	DIN 1.0/2.3
End B connector	DIN 1.0/2.3
Cable diameter	5.0 mm
Length	3/5/10 m
Cable mechanical	Coaxial
Jacket	PVC
Cable color	Black
Connector durability	500 cycles
Min. bending radius	60 mm
Applicable scenario	Tank chain
Max .U-type bending cycles	2 million times
Electrical specification	
Max. voltage	300 VDC
Additional information	
Working temperature	-30°C ~ 80°C
Certification	RoHS, UL
Packaging	Individual package

Read the user manual for the camera including the precautions before connecting the cable to the camera.

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.