

**MV-ACXP6-DIN-HDBNC-HF-\*m****CXP-6 HIGH FLEX DATA CABLE**

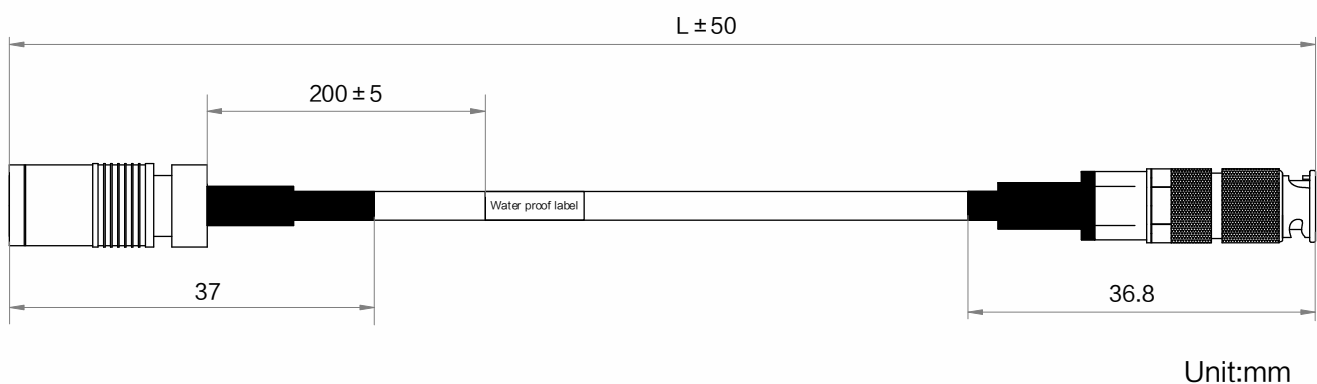
The CXP-6 High Flex Data Cable can be used for data transmission of CoaxPress interface cameras, and is available in a variety of lengths.

**Applicable Camera:**

Hikrobot CoaxPress Interface Industrial Camera

**Order Models:**

- 3m CXP-6 High Flex Data Cable: MV-ACXP6-DIN-HDBNC-HF-3m
- 5m CXP-6 High Flex Data Cable: MV-ACXP6-DIN-HDBNC-HF-5m
- 10m CXP-6 High Flex Data Cable: MV-ACXP6-DIN-HDBNC-HF-10m

**Dimension:**

## Specification

Specifications	Model	MV-ACXP6-DIN-HDBNC-HF-*m
		CXP-6 High Flex Data Cable
<b>Physical specification</b>		
End A connector		DIN 1.0/2.3
End B connector		HD-BNC
Cable diameter		7 mm
Length		3/5/10 m
Cable mechanical		
Jacket		PVC
Cable color		Black
Connector durability		500 cycles
Min. bending radius		84 mm
Applicable scenario		Tank chain
Max .U-type bending cycles		2 million times
<b>Electrical specification</b>		
Max. voltage		300 VDC
<b>Additional information</b>		
Working temperature		-30°C~ 80°C
Certification		
Packaging		Individual package

Read the user manual for the camera including the precautions before connecting the cable to the camera.

**HIKROBOT**

Hangzhou Hikrobot Technology Co.,Ltd.  
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.  
en.hikrobotics.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.