

**MVL-MF1618M-5MPE**  
**2/3" 16mm 5MP FA LENS**


MF-E series FA Lens are optimized for machine vision light sources and sensors, with high resolution, excellent image uniformity, high transmittance and good stability. Featured with fixed focal length, manual aperture and compact size, it is suitable for machine vision industry applications.




**Key Feature**

- High resolution and consistency of image clarity
- Lower distortion and higher relative illumination rate
- Achromatic optical system design and better imaging performance with color camera
- Excellent performance at high and low temperature
- Good optical performance at ultra-short working distance


**Distortion**

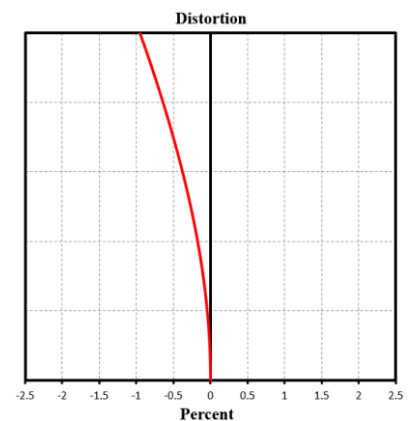

**MTF**

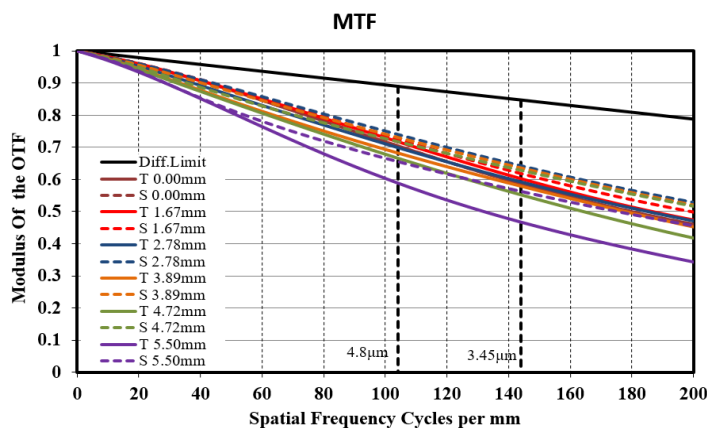

**Relative Illumination**

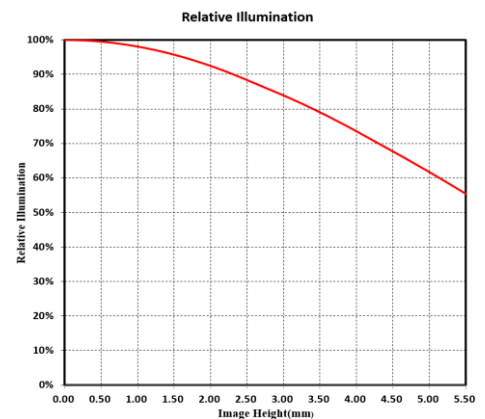


Note: The above curves are the simulate results based on F1.8,  $\beta=-0.032$ , WD=500 mm



## Specification

<b>Model</b>	<b>MVL-MF1618M-5MPE</b>
<b>Performance</b>	
<b>Focal length</b>	16 mm
<b>F-number</b>	F1.8 to F16
<b>Image size</b>	Φ11 mm (2/3")
<b>Distortion</b>	0.98%
<b>Min. object distance</b>	0.2 m
<b>Field of view</b>	D (11.1 mm): 39.98° H (8.45 mm): 30.75° V (7.07 mm): 25.08°
<b>Mechanical</b>	
<b>Iris control</b>	Manual
<b>Focus control</b>	Manual
<b>Filter thread</b>	M27 × 0.5
<b>Mount</b>	C-Mount
<b>Flange back length</b>	17.526 mm
<b>Dimension</b>	Φ29 × 38.1 mm to 40.1 mm
<b>Weight</b>	68.0 g
<b>Temperature</b>	-10 °C to 50 °C (14 °F to 122 °F)
<b>General</b>	
<b>Certification</b>	RoHS 2.0

## Dimension

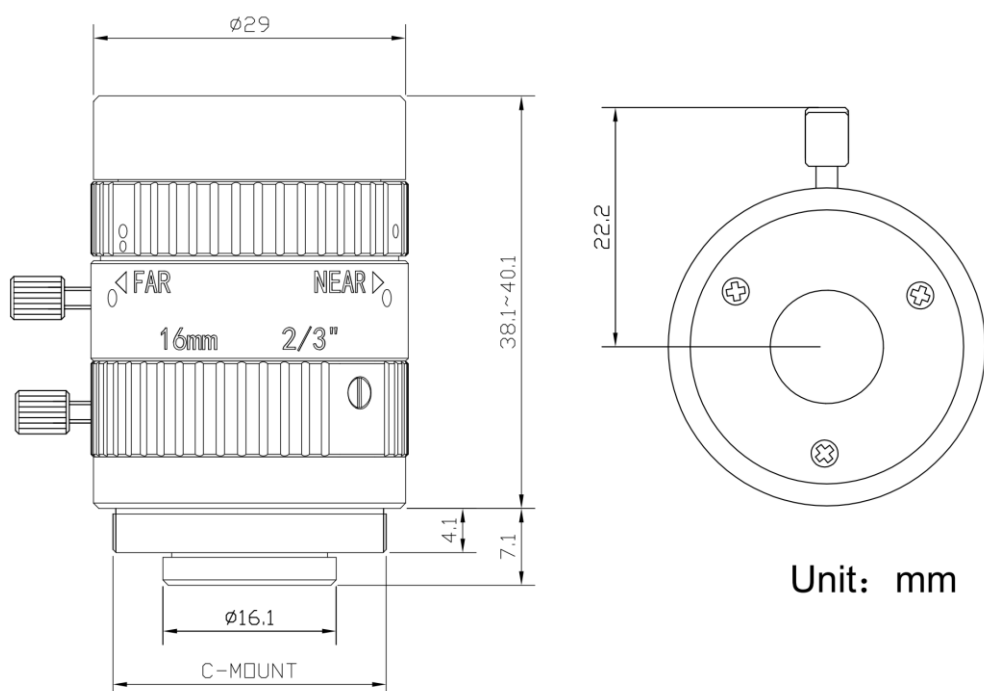

## Field of View

Extension (mm)	Working Distance (mm)		Magnification	Field of View (mm)					
				2/3"		1/1.8"		1/2"	
				H (8.45mm)	V (7.07mm)	H (7.38mm)	V (4.92mm)	H (6.22mm)	V (4.67mm)
20	Near	2.1	-1.263	6.6	5.5	5.8	3.8	4.9	3.6
	Far	2.3	-1.215	6.9	5.7	6.0	4.0	5.1	3.8
15	Near	5.9	-0.967	8.6	7.2	7.6	5.0	6.4	4.8
	Far	6.5	-0.909	9.2	7.6	8.0	5.3	6.8	5.1
10	Near	13.2	-0.671	12.4	10.4	10.9	7.2	9.1	6.8
	Far	15.1	-0.605	13.8	11.5	12.1	8.0	10.1	7.6
5	Near	32.3	-0.375	22.3	18.6	19.4	12.9	16.3	12.2
	Far	41.6	-0.299	27.9	23.3	24.3	16.1	20.4	15.3
2	Near	71.9	-0.197	42.7	35.6	37.1	24.6	31.2	23.3
	Far	126.5	-0.115	73.0	60.9	63.2	42.0	53.1	39.8
1	Near	108.4	-0.137	61.4	51.2	53.3	35.4	44.8	33.5
	Far	288.7	-0.053	159.0	132.7	135.9	90.3	114.2	85.6
0		200	-0.078	108.4	90.5	94.5	62.8	79.5	59.6
		250	-0.063	134.7	112.5	117.5	78.1	98.9	74.2
		300	-0.052	161.0	134.5	140.6	93.5	118.3	88.7
		350	-0.045	187.4	156.5	163.7	108.8	137.8	103.3
		400	-0.039	213.8	178.6	186.7	124.2	157.2	117.8
		450	-0.035	240.2	200.6	209.8	139.5	176.6	132.4
		500	-0.032	266.5	222.6	232.8	154.8	196.0	146.9
		550	-0.029	292.9	244.7	255.9	170.2	215.4	161.5
		600	-0.026	319.3	266.7	279.0	185.5	234.8	176.1
		650	-0.024	345.7	288.7	302.0	200.9	254.2	190.6
		700	-0.023	372.0	310.8	325.1	216.2	273.6	205.2
		800	-0.020	424.8	354.8	371.2	246.9	312.5	234.3
		900	-0.018	477.5	398.9	417.3	277.6	351.3	263.4
	1000	-0.016	531.2	443.7	462.5	307.6	390.1	292.5	

**HIKROBOT**

Hangzhou Hikrobot Co. Ltd.  
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.