

MV-AC10G-RJ45s-RJ45-HF

RJ45 HIGH FLEXIBLE 10 GIGABIT ETHERNET CABLE

The RJ45 High Flexible 10 Gigabit Ethernet Cable can be used for data transmission of RJ45 10 Gigabit Ethernet interface cameras, and is available in a variety of lengths.




Applicable Camera:

Hikrobot RJ45 10 Gigabit Ethernet Interface Industrial Camera

Order Models:

- 3m RJ45 High Flexible 10 Gigabit Ethernet Cable: MV-AC10G-RJ45s-RJ45-HF-3m
- 5m RJ45 High Flexible 10 Gigabit Ethernet Cable: MV-AC10G-RJ45s-RJ45-HF-5m
- 10m RJ45 High Flexible 10 Gigabit Ethernet Cable: MV-AC10G-RJ45s-RJ45-HF-10m

Dimension:

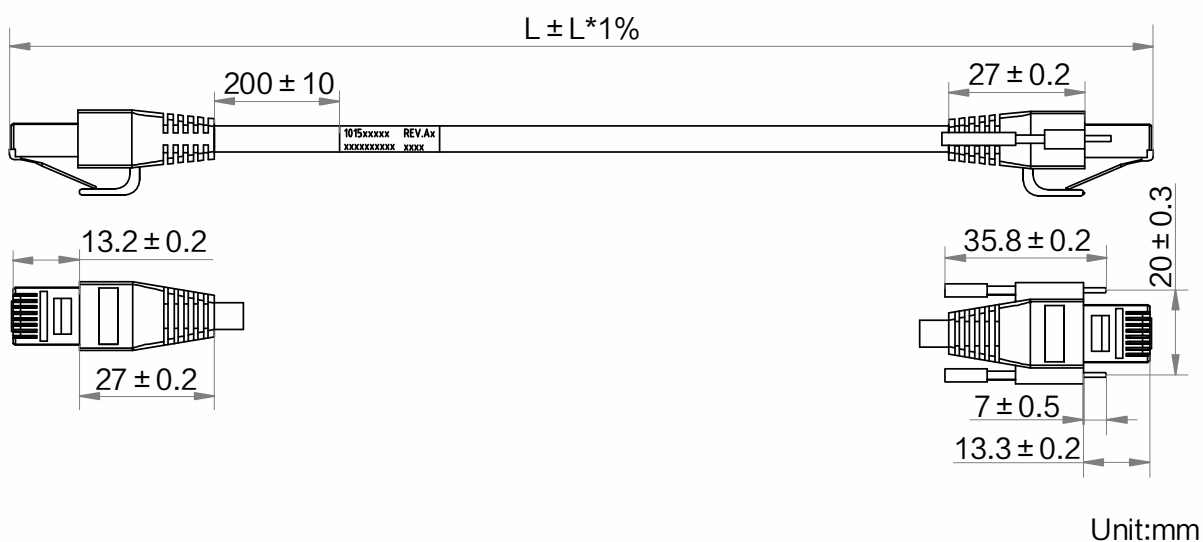

Specification

Specifications	Model	MV-AC10G-RJ45s-RJ45-HF
		RJ45 High Flexible 10 Gigabit Ethernet Cable
Physical specification		
End A connector		RJ45 (with locking stud)
End B connector		RJ45
Cable diameter		7.0 mm
Length		3/5/10 m
Cable mechanical		(26#*1P+AL)*4C+AB
Jacket		PVC
Cable color		Black
Connector durability		>750 cycles
Min. bending radius		84 mm
Applicable scenario		Drag chain
Max. U-type bending cycles		5 million times
Electrical specification		
Max. voltage		30 VDC
Additional information		
Working temperature		-20°C ~ 75°C
Certification		RoHS, UL
Packaging		Individual package

Read the user manual for the camera including the precautions before connecting the cable to the camera.

HIKROBOT

Hangzhou Hikrobot Co., Ltd.
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.